

2.54mm ISA SLOT CONNECTOR


5470 SERIES. 2.54mm (0.100"). For PCB Solder

Features

- Insulator Material: Glass filled polyester UL 94V-0
- Contact Material: Brass
- With standoff to prevent flux wicking
- With kinked tails to secure connector while soldering
- Optional key available
- Polarising slot construction

Dimensional Information

Ordering and Dimensional Information

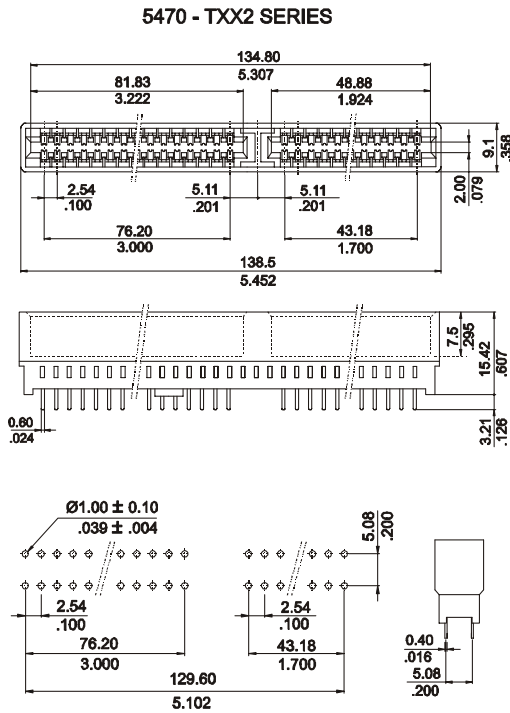


Circuit Size	Part Number	Dimensions		
		A	B	C
6/12	5470 - T061	21,90(0,862)	17,90(0,705)	12,70(0,500)
10/20	5470 - T101	32,06(1,262)	28,06(1,105)	22,86(0,900)
12/24	5470 - T121	37,14(1,462)	33,14(1,305)	27,94(1,100)
13/26	5470 - T131	39,68(1,562)	35,68(1,405)	30,48(1,200)
14/28	5470 - T141	42,22(1,662)	38,22(1,505)	33,02(1,300)
15/30	5470 - T151	44,76(1,762)	40,76(1,605)	35,56(1,400)
17/34	5470 - T171	49,84(1,962)	45,84(1,805)	40,64(1,600)
18/36	5470 - T181	52,38(2,062)	48,38(1,905)	43,18(1,700)
19/38	5470 - T191	54,92(2,162)	50,92(2,005)	45,72(1,800)
20/40	5470 - T201	57,46(2,262)	53,46(2,105)	48,26(1,900)
22/44	5470 - T221	62,54(2,462)	58,54(2,305)	53,34(2,100)
23/46	5470 - T231	65,08(2,562)	61,08(2,405)	55,88(2,200)
25/50	5470 - T251	70,16(2,762)	66,16(2,605)	60,96(2,400)
30/60	5470 - T301	82,86(3,262)	78,86(3,105)	73,66(2,900)
31/62	5470 - T311	85,40(3,362)	81,40(3,205)	76,20(3,000)
32/64	5470 - T321	87,94(3,462)	83,94(3,305)	78,74(3,100)
36/72	5470 - T361	98,10(3,862)	94,10(3,705)	88,90(3,500)
40/80	5470 - T401	108,26(4,262)	104,26(4,105)	99,06(3,900)
43/86	5470 - T431	115,88(4,562)	111,88(4,405)	106,68(4,200)
49/98	5470 - T491	131,12(5,162)	127,12(5,005)	121,92(4,800)
31-18 / 62-36	5470 - T492	138,74 (5,262)	-	135,10 (5,319)
50/100	5470 - T501	133,66(5,262)	129,66(5,105)	124,46(4,900)


T = Contact Plating

- T = 3. Gold flash over 50µ" nickel.
- T = 5. 15 µ" gold over 50 µ" nickel

RECOMMENDED HOLE PATTERN

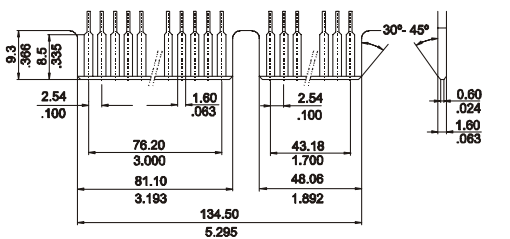

5470 - TXX1 SERIES

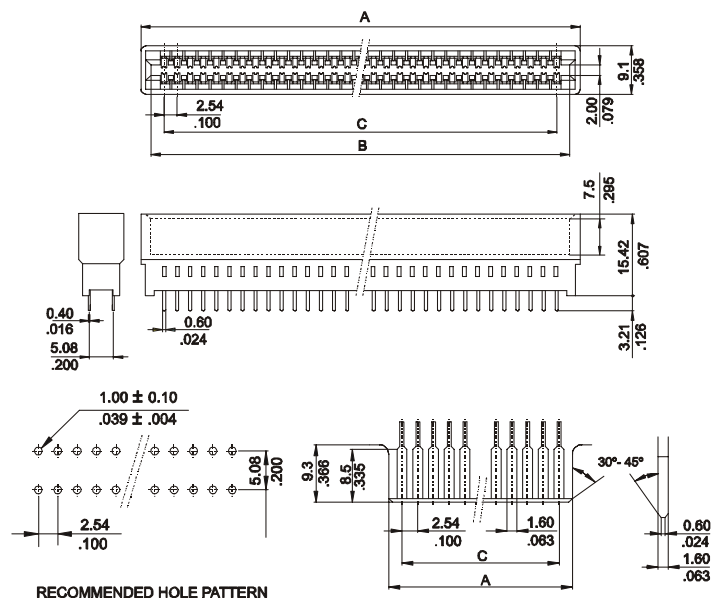

RECOMMENDED HOLE PATTERN